

# PPC

## PS-6505-PPC

### Pentium® M High Performance 15" Panel PC

#### Features and Benefits:

- Pentium® M / Celeron® M high performance platform
- 15" LCD display with touch screen
- Supports IP65 protection (front panel)
- 802.11 b/g WLAN communication capability
- Supports CF Type I/II socket
- VESA 100 Wall mounting kits available



**WEPOS  
Ready**



No. 24, Lane 365, Yang Guang St., Nei Hu District, Taipei 114, Taiwan, R.O.C.

Tel: +886-2-8751-1111

Fax: +886-2-8751-1199

Email: [sales@protech.com.tw](mailto:sales@protech.com.tw)


<http://www.protech.com.tw>




**ISO CERTIFIED**  
**9001 14001**

# PS-6505-PPC Pentium® M High Performance 15" Panel PC


Bird View

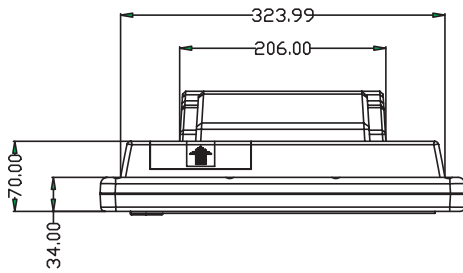

Front View

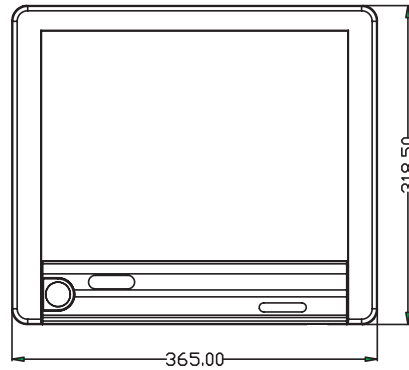

Side View

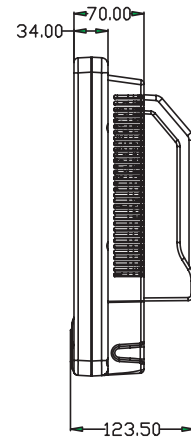

Unit: mm

## Specification

System	
<b>CPU Support</b>	Intel® Celeron® M 1.3GHz CPU (up to Pentium® M 2.0GHz)
<b>Memory</b>	1x SO-DIMM Slot, 256MB DDR SDRAM(up to 1GB)
<b>Core Logic</b>	Intel® 852GM & ICH4 supports FSB 400MHz CPU, DDR 200 / 266 Intel® 855GME & ICH4 support FSB 400MHz CPU, DDR 266 / 333
<b>Expansion</b>	32-bit Mini-PCI slot x 1
<b>Network</b>	10/100Base-T Fast Ethernet (optional 802.11 b/g WLAN Mini-PCI module)
<b>Audio</b>	AC '97 Codec with internal mono speaker (2watt x 1)
<b>Power Supply</b>	200W ATX power supply, AC 100-240V input
<b>System Weight</b>	7.2kg
<b>Mounting Type</b>	Support VESA100 standard
<b>Dimension (WxHxD)</b>	365 x 318.5 x 123.5 mm (14.37" x 12.54" x 4.862")
<b>O.S. Compliant</b>	Windows 98/2000/XP/XPE, Linux, WEPOS

## Storage

<b>HDD</b>	1 x 3.5" HDD (standard 40GB)
<b>CD-ROM</b>	1 x slim-type CD-ROM (optional)
<b>CF</b>	1 x bootable Compact Flash slot for CF type I/II storages

## I/O Ports

<b>USB</b>	3 x USB 2.0 ports
<b>Serial Ports</b>	2 x DB-9 (COM1&2), 2 x RJ45 (COM3&4), +5V/12V Selectable
<b>Parallel</b>	1 x Parallel port (SPP/EPP/ECP)
<b>PS/2</b>	2 x PS/2 ports
<b>LAN</b>	1 x 10/100 Mbps
<b>Audio</b>	1 x Line-out audio jack
<b>VGA</b>	1 x DB-15 VGA Interface
<b>Others</b>	1 x RJ11 port for 12V Cash Drawer
<b>Option</b>	MSR, i-Button

## Display

<b>LCD</b>	15" TFT LCD
<b>Max. Resolution</b>	1024 x 768
<b>Brightness</b>	250 cd/m2
<b>Touch Screen</b>	5- wire Analog resistive
<b>Viewing Angle</b>	0 ~ 60 degree
<b>Protection</b>	IP65/NEMA4 water/dust proof front panel (without MSR)

## Environment

<b>EMC &amp; Safety</b>	CE, FCC, UL
<b>Operating Temp.</b>	0°~ 40°C
<b>Storage Temp.</b>	-20°~ 60°C
<b>Humidity</b>	20% ~ 90%

## Ordering Information

PS-6505-PPC	15" Panel PC with Celeron-M 1.3GHz CPU, 256MB DDR SO-DIMM, 40GB HDD
PS-6505-PPC-M1	PS-6505-PPC with ISO track 1+2+3 (JIS-I) Magnetic Card reader
PS-6505-PPC-M2	PS-6505-PPC with JIS-II + ISO track 1+2 Magnetic Card reader
PS-6505-PPC-L	PS-6505-PPC with 802.11 b/g Wireless LAN module
i-Button + MSR 1	i-Button: Read only, output through PS/2 KB interface MSR: JIS-I, ISO Track 1+2+3
i-Button + MSR 2	i-Button: Read only, output through PS/2 KB interface MSR: JIS-II+ ISO Track 1+2
Color	Black or Beige
OS	Win98/2000/XP/XPE/WEPOS/Linux

All of trademarks and brand names are the property of their owners. Trademark "Protech" is the property of Protech Systems Co., Ltd. All information contained in this document is subject to change without any prior notice. This catalog is copyrighted in Nov. 2005