

POS



PS6505-MIT

Pentium® M / Celeron® M Multimedia Interactive Terminal

Features and Benefits:

- Pentium® M / Celeron® M Multimedia Interactive Terminal
- 15" LCD display with ELO 5-wire resistive touch screen
- Built-in Omni-direction Laser Scanner
- Optional Type I/II CF Card Module
- Optional MSR
- VESA 75/100 Wall Mount Standard
- Ultra Slim Shape
- Optional Classic Headphone



No. 24, Lane 365, Yang Guang St., Nei Hu District, Taipei 114, Taiwan, R.O.C.

Tel: +886-2-8751-1111

Fax: +886-2-8751-1199

Email: sales@protech.com.tw

<http://www.protech.com.tw>




ISO CERTIFIED
9001 14001


PS6505-MIT

Pentium® M / Celeron® M Multimedia Interactive Terminal

Front View

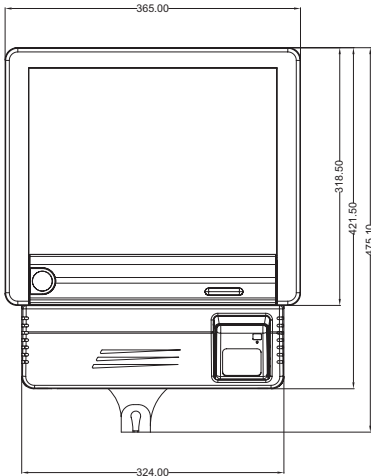

Rear View

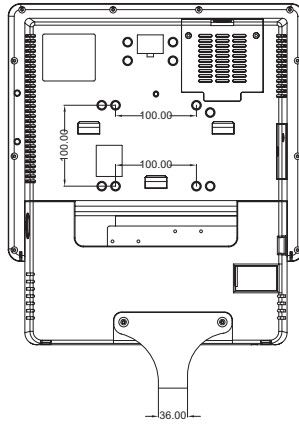

Flank View



Unit: mm

Specification

System

CPU Support	Intel® Celeron® M 1.5GHz CPU (up to Pentium® M 1.8GHz)
Memory	1 x DDR SO-DIMM Slot, 256MB DDR SDRAM (up to 1GB)
Core Logic	Intel® 855GME & ICH4 support FSB400 MHz CPU, DDR 266 / 333
Expansion	32-bit Mini-PCI slot x 1
Network	10/100 Base-T Fast Ethernet (Optional 802.11 b/g WLAN Mini-PCI module)
Audio	AC '97 Codec with internal mono speaker (2 watt x 1)
Power Supply	180W ATX power supply, AC 100-240V input
O.S. Compliant	Windows 2000/XP/XPE/WEPOS
Dimension (WxHxD)	421.5 x 365 x 70 mm

Storage

HDD	1 x 2.5" HDD (standard 40GB)
CF	Optional 1 x bootable Compact Flash slot for CF type I/II storages

I/O Ports

USB	2 x USB 2.0 ports 1 x USB for Built-in Omni-direction Laser Scanner
Serial Ports	2 x DB-9 (COM 1 & 2), 2 x RJ45 (COM 3 & 4), +5V/12V Selectable
Parallel	1 x Parallel port (SPP/EPP/ECP)
PS/2	2 x PS/2 ports

LAN	1 x 10/100 Mbps
Audio	1 x Line-out audio jack
VGA	1 x DB-15 VGA interface
Cash Drawer	1 x RJ11 port for DC12V Cash Drawer

Display

LCD	15" TFT LCD
Max. Resolution	1024 x 768
Viewing Angle	0 ~ 65 degree
Brightness	250 cd/m ²
Touch Screen	5-wire Analog resistive

Environment

EMC & Safety	CE, FCC, UL
Operating Temp.	0° ~ 40°C
Storage Temp.	-20° ~ 60°C
Humidity	20% ~ 90%

Ordering Information

PS6505-MIT	15" POS terminal with Celeron-M 1.5GHz CPU, 256MB DDR SO-DIMM, 40GB HDD, Omni-direction Laser Scanner
MSR	JIS-II, ISO Track 1+2+3
WLAN Module	802.11 b/g Wireless LAN module
Color	White
OS	2000/XP/XPE/WEPOS

All of trademarks and brand names are the property of their owners. Trademark "Protech" is the property of Protech Systems Co., Ltd. All information contained in this document is subject to change without any prior notice. This catalog is copyrighted in DEC. 2006